Technical Data

Product Code	771973
Model Number	SubPro 450SF
Description	Tucson SubPro Multistage Submersible Pump with Float Switch
Voltage / Frequency	230V / 50Hz
Wattage	450W
Pumped Liquid Temperature Range	5°-40°C
Maximum Submersion Depth	5m
Minimum Submersion Depth	0.2m
Max Working Pressure	10 bar
Maximum Head	7.5m
Max Flowrate / Q Max	150 L/min
Ingress Protection Rating	IP68
Outlet Connection	G1 ¼ Female
AC Connection	10m cable with UK plug
Pump Weight	5kg
Material Specification	Pump Housing - SUS304 Impeller - SUS304
Manufacturing Standards	EN 60335 1:2012 + A11:2014 + A13:2017 + A1:2019 + A14:2019 + A2 + A15:2021 EN IEC 60335-2-41:2021 + A11:2021 EN 62233:2008+AC:2008 EN 809:1998 + A1:2009 + AC 2010

SubPro 450SF Pump Image

SubPro 450SF Pump Dimensions

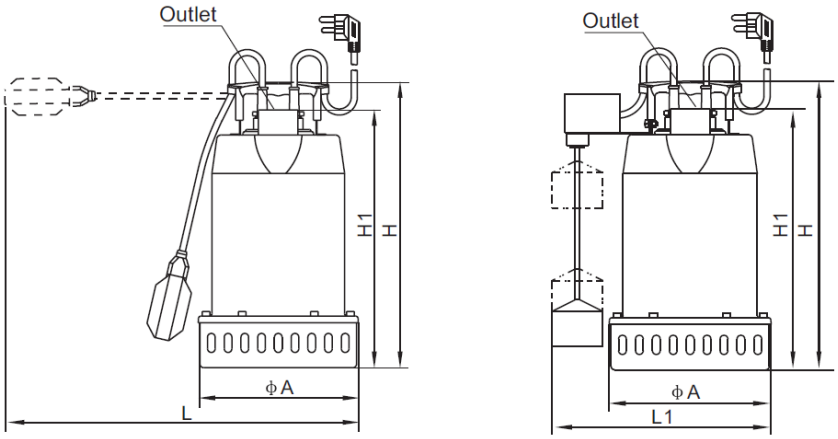

Model	H	H1	L	L1	A	Outlet
QCK45M(A)	273	231	380	242	167	G1.25ör G1"

Dimensions in mm
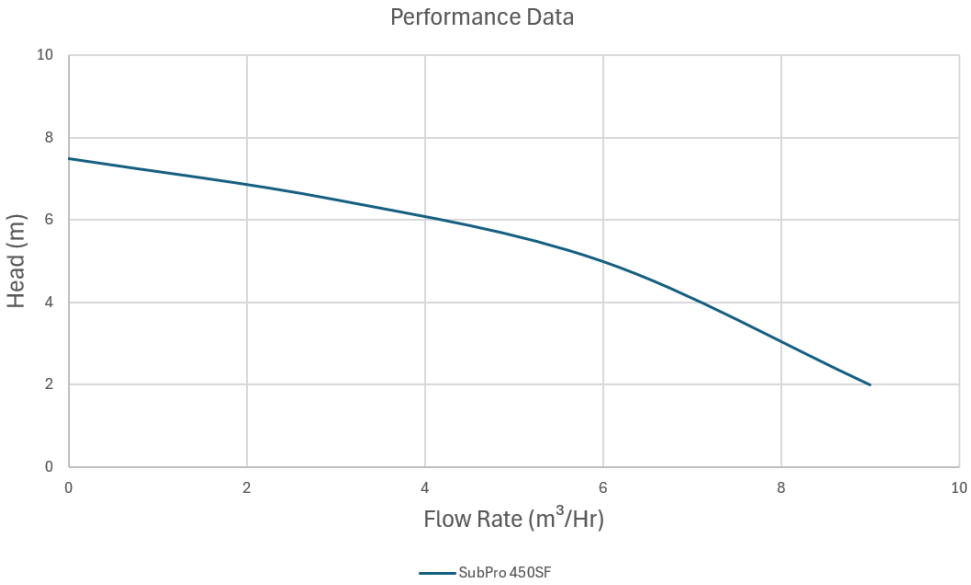
SubPro 450SF Performance Curve